



Trailer mounted lift
TM13G



Trailer mounted lift TM13G

STANDARD EQUIPMENT

- Platform rotator 2x45°
- Basket leveling trough parallel rods
- Alu basket with wide tool tray, safety handrail and dual harness points
- Proportional electro hydraulic controls by fingertip joysticks
- Ground pressure sensors on all outrigger plates with audible and visible alarms
- 230V outlet in the basket
- Hourmeter
- Ground and upper controls with tarp cover
- EC type road approval
- Manual recovery with hand pump
- Automatic reverse and overrun brakes plus handbrake
- Colour of the machine: RAL 3002 (red)

OPTIONS

- Auto chassis level
- Custom colour
- Dual-Power source 230V & Honda
- Batterie Power 24V 225Ah
- On-board 230V Generator 5KV Honda EM5500
- G.R.P. basket with tool tray (2 person)
- Outrigger plate pads

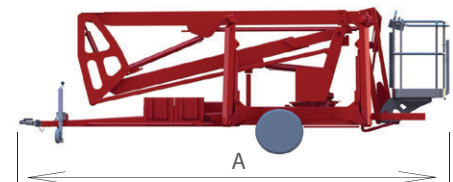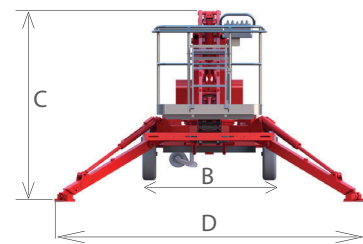

SPECIFICATIONS



Working height 13.1 m

Platform height 11.1 m

Outreach 6.1 m



Platform capacity 220 kg

Rotation (non continuous) 355°

Jib length 1.2 m

Platform dimensions 1,2x0,8x1,1 m



Platform rotation 2x45°



Transport length (A) 6,35 m

Transport width (B) 1,55 m

Transport height (C) 1,99 m



Gross weight (230V) 1450 kg

Gross weight (24V DC vers.) 1580 kg

Outrigger footprint (D) 3.45 m

Outrigger plate outer edge

Gradeability 8%




Max. tow speed 80 km/h



Braking Overrun Brakes with Gas Spring



Tyres 195 R 14 C

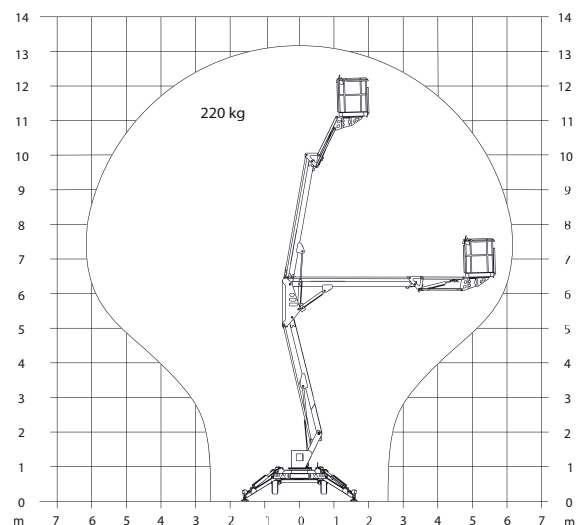

www.instant.no

INSTANT

Norway

Tel.: +47 23 19 11 00
info@instant.no

Lithuania

Tel.: +370 5 233 1096
info@instant.lt

Latvia

Tel.: +371 263 58 152
info@instantlatvija.lv

Estonia

Tel.: +372 680 76 33
info@instant.ee